

BP BendPak

R Ranger



The Benchmark of Quality[®]



This is my BendPak

**There are many,
But this one's ~~mine.~~
Ours**

"We use BendPak lifts because they allow us to safely maintain and keep our cars the fastest on the street along with all of our customer's cars."

*- Big Chief & Murder Nova,
Midwest Street Cars & TV's "Street Outlaws"*

BP BendPak

For more information on BendPak's entire product line,
call 1-800-253-2363 or visit www.bendpak.com



Table of Contents

4-5	Medium-Duty Clearfloor Lifts
6-7	Medium-Heavy Floor Plate Lifts
8-9	Heavy-Duty Clearfloor Lifts
11-13	4-Post Light-Duty Lifts
14	Options / Accessories
16-17	4-Post Heavy-Duty Lifts
18	Alignment Lifts
19	Rolling Bridge Jacks
20-21	Quatra Scissors
23	Portable Column Lift
24-25	Low-Rise & Mid-Rise Lifts
26-27	Parking & Storage
28	Image Gallery
30-31	Pipe Benders
32-33	Air Compressors
34	Power Units
35	QuickJack
36-37	Tire Changers
38	Tire Repair / Brake Lathes
39	Wheel Balancers / Wheel Aligner
40-41	Floor Jacks / Transmission Jacks
42	Jacks Stands
43	Motorcycle Lifts
44	Carts & Dollies / Shop Presses
45	Work Benches / Hose Reels
46	Oil Drains / Oil Filter Crushers
47	Parts Washer
48	Wheel Balancer / Work Seat / Tire Changer / Portable Air Cooler
49	Engine Support / Engine Stand / Shop Crane
50-51	Manufacturing Superiority

Equipment models shown in this catalog may be available in different voltages upon request.




GENERAL DISCLAIMER

BENDPAK/RANGER warrants to the original purchaser only that all products shown in this catalog conform to BENDPAK/RANGER published specifications and are free from defects in material or workmanship. In no event will BENDPAK/RANGER be liable to you or to anyone else for any decision made or action taken by you or anyone else in reliance on information obtained from this catalog. BENDPAK/RANGER has exclusive title and ownership rights, including all intellectual property right, throughout the world in all material and content contained on these pages. Materials, design, specifications, images and other content within this catalog are subject to change. BENDPAK/RANGER does not take responsibility for improper use or any results thereof. BENDPAK/RANGER products are provided and sold as is without any express or implied warranties including warranties of merchantability or fitness for particular purpose. In no event will BENDPAK/RANGER be liable for any special, incidental, or consequential damages based on breach of warranty, breach of contract, negligence, strict tort, or any other legal theory. Damages that BENDPAK/RANGER will not be responsible for include, but are not limited to: loss of profits; loss of savings or revenue; loss of use of the product or any associated equipment; cost of capital; cost of any substitute equipment, facilities, or services; downtime; the claims of third parties, including customers; and injury to property. This limitation does not apply to damages caused by breach of the warranty of title and against infringements or to claims for personal injury. Unless modified in a writing signed by both parties, it is understood that BENDPAK/RANGER published warranties are to be the complete and exclusive agreement between the parties. For complete and full warranty details contact BENDPAK/RANGER at 1-805-933-9970 or visit www.bendpak.com

Medium-Duty Clearfloor

SERIES FEATURES:

- Wide or narrow configuration
- Exclusive "Tru-Metric" arms
- Single-point safety release
- Dual "Direct-Drive" cylinders
- Electric / hydraulic power
- 17" x 19" A36 steel base plate
- UHMW polyethylene bearings
- Dual 3"- spaced safety locks
- Automatic arm restraints
- Heavy-duty aircraft cable
- Oversized sheave diameter
- Padded safety-shutoff bar
- 4-piece truck and van adapters
- Triple-telescoping / low-pro arms
- Telescoping screw pads
- Stackable adapters
- Single piece columns
- Optional foot guards
- Accommodates a wide variety of vehicles assemblies
- Safety locks in each column

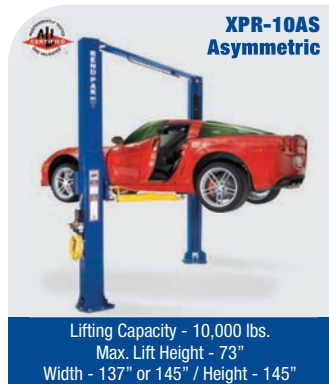

- XPR-10S-168**
Clearfloor Extended Height
 - XPR-10S-168-LP**
Clearfloor Extended Height / Low-Pro Arms
 - XPR-10TS-168**
Clearfloor Extended Height / 4 Triple Arms
 - XPR-10AS-168**
Asymmetric Extended Height
 - XPR-10AS-168-LP**
Asymmetric Extended Height / Low-Pro Arms
- Features bolt-on top extension for added 24" clearance

ACCESSORIES:



Polyurethane Tuf-Pads



Steel Lift Pads



Frame Cradle Pads



Offset Adapters



Air / Electric Work Station


XPR-10AS

Shown with air / electric work station and foot guards



FREE truck and van adapters come standard with all BendPak 2-post lifts

Featuring:
NEW
TELESCOPING
SCREW PADS

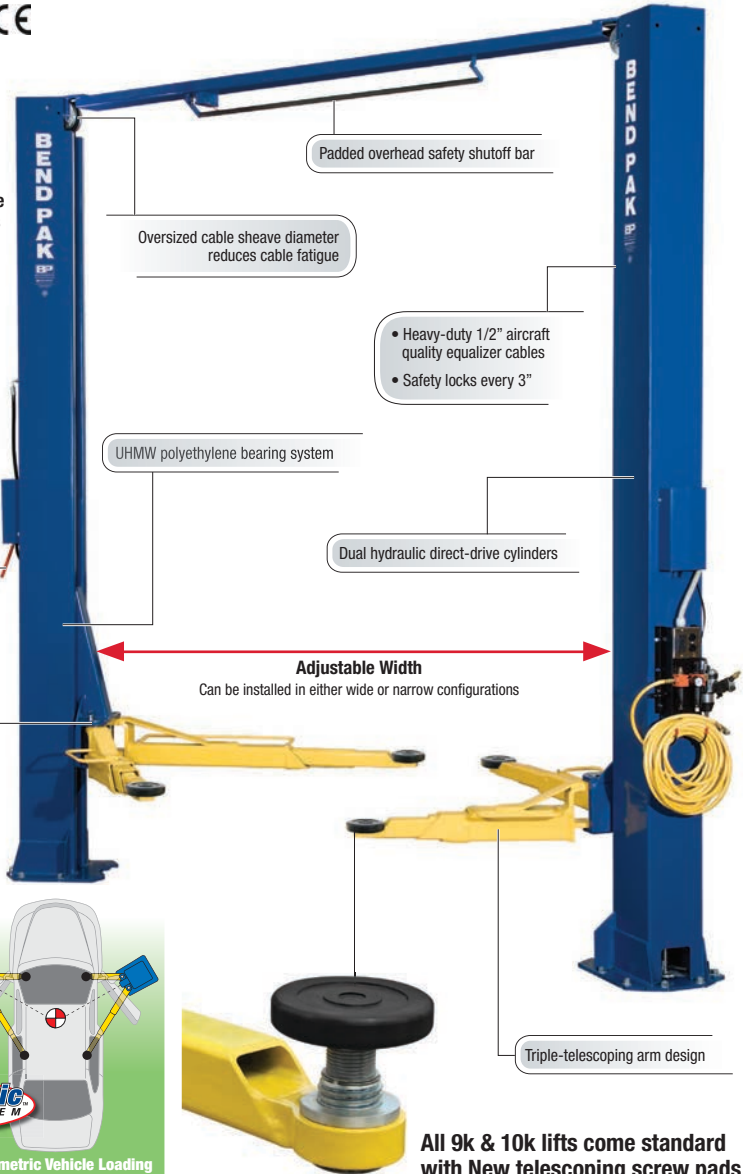

Padded overhead safety shutoff bar

Oversized cable sheave diameter reduces cable fatigue

- Heavy-duty 1/2" aircraft quality equalizer cables
- Safety locks every 3"

UHMW polyethylene bearing system

Single point safety release


Dual hydraulic direct-drive cylinders

Adjustable Width


Can be installed in either wide or narrow configurations

Automatic arm restraints

Triple-telescoping arm design



Symmetric Vehicle Loading



Asymmetric Vehicle Loading



All 9k & 10k lifts come standard with New telescoping screw pads

Medium-Heavy Floor Plate

SERIES FEATURES:

- Adjustable width design
- Dual hydraulic lifting cylinders
- Single-piece columns
- Single point safety release
- Drop-end arms provide a lower pad height
- Triple-telescoping arms
- Electric / hydraulic system
- Self-lubricating dura-glide UHMW polyethylene bearing system
- Dual 3"- spaced safety locks
- Automatic arm restraints
- Truck and van adapters
- Telescoping screw pads
- Adjustable wide or narrow drive-thru configurations
- Durable powder coat finish
- Open top design
- Large steel base plates
- Heavy-duty 3/8" equalizer cables
- Rugged steel construction

CE **XPR-9S**
Shorty Floor Plate



Lifting Capacity - 9,000 lbs.
Max. Lift Height - 76"
Width - 132" or 145" / Height - 113"

CE **XPR-9S-LP**
Shorty Floor Plate
Low-Pro™ Arms



Lifting Capacity - 9,000 lbs.
Max. Lift Height - 76"
Width - 132" or 145" / Height - 113"

CE **XPR-9TS**
Shorty Floor Plate
4 Triple Arms



Lifting Capacity - 9,000 lbs.
Max. Lift Height - 76"
Width - 132" or 145" / Height - 113"

 **CE** **XPR-9DS**
Direct-Drive Floor Plate



Lifting Capacity - 9,000 lbs.
Max. Lift Height - 73"
Width - 132" or 145" / Height - 145"

 **CE** **XPR-9DS-LP**
Direct-Drive Floor Plate
Low-Pro™ Arms



Lifting Capacity - 9,000 lbs.
Max. Lift Height - 73"
Width - 132" or 145" / Height - 145"

 **CE** **XPR-12FDL**
Heavy-Duty Floor Plate



Frame cradle pads come standard
Lifting Capacity - 12,000 lbs.
Max. Lift Height - 74"
Width - 155" / Height - 144"

 **CE** **XPR-12FDL-LWB**
Heavy-Duty Floor Plate
Long-Wheelbase Arms



Frame cradle pads come standard
Lifting Capacity - 12,000 lbs.
Max. Lift Height - 74"
Width - 155" / Height - 144"



Triple-telescoping arms

ACCESSORIES:



Polyurethane Tuf-Pads



Steel Lift Pads



Frame Cradle Pads



Offset Adapters



Air / Electric Work Station

XPR-9DS Direct-Drive Floor Plate

Shown with air / electric work station and foot guards



- Heavy-duty dual 3/8" equalizer cables
- Safety locks every 3"

Oversized cable sheave diameter reduces cable fatigue

Featuring:
NEW
TELESCOPING
SCREW PADS

Dual hydraulic direct-drive cylinders

Single point safety release

UHMW polyethylene bearing system

Automatic arm restraints

Triple-telescoping arm design

Low profile floor plate



FREE truck and van adapters come standard with all BendPak 2-post lifts

All 9k & 10k lifts come standard with New telescoping screw pads

Heavy-Duty Clearfloor

SERIES FEATURES:

- Dual-synchro equalization system
- Electric / hydraulic power system
- UHMW polyethylene bearings
- Single-piece columns
- Dual "Direct-Drive" cylinders
- Single point safety release
- Automatic arm restraints
- 8-piece truck and van adapters
- Oversized column base plates
- Padded safety-shutoff bar
- Safety locks in each column
- Heavy-duty 1/2" equalizer cables
- Powder coat finish
- Rubber door bumpers
- Versatile drop in contact pads with convenient storage
- Triple-telescoping arms / XPR-12 series
- Extended height top-beam provides greater overhead clearance
- Oversized cable sheave diameter
- Rubber lift pads with stackable adapters



XPR-12CL Clearfloor

Frame cradle pads come standard

Lifting Capacity - 12,000 lbs.
Max. Lift Height - 74"
Width - 155" / Height - 170"



XPR-15CL Clearfloor

Frame cradle pads come standard

Lifting Capacity - 15,000 lbs.
Max. Lift Height - 74"
Width - 155" / Height - 170"



XPR-18CL Clearfloor

Frame cradle pads come standard

Lifting Capacity - 18,000 lbs.
Max. Lift Height - 74"
Width - 155" / Height - 170"



XPR-12CL-LWB Long-Wheelbase Arms

Frame cradle pads come standard

Lifting Capacity - 12,000 lbs.
Max. Lift Height - 74"
Width - 155" / Height - 170"



16-Piece Adapter Set



Included on all truck two-post models

ACCESSORIES:



Polyurethane Tuf-Pads



Frame Cradle Pads



Mobile High-Lift Jack Stand




Steel Lift Pads



Air / Electric Work Station



XPR-12CL-192
XPR-12CL-LWB-192
XPR-15CL-192
XPR-18CL-192
 Features bolt on top extension for added 24" clearance

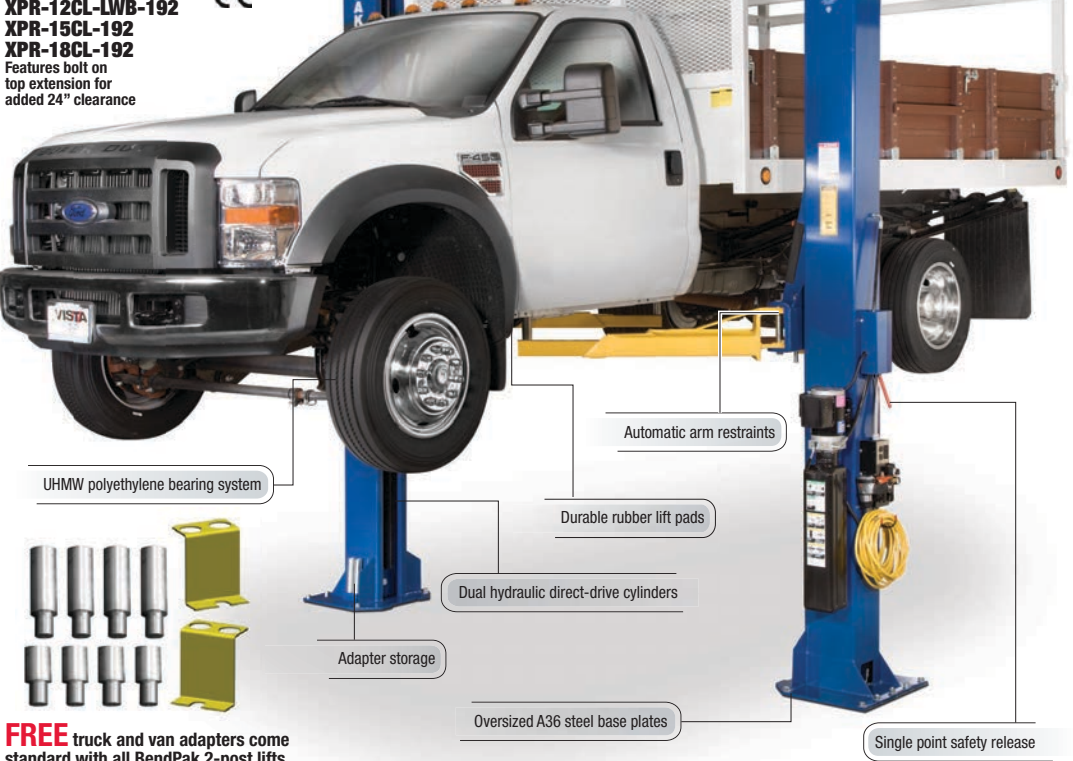

Padded overhead safety shutoff bar

Oversized cable sheave diameter reduces cable fatigue

- Heavy-duty 1/2" aircraft-quality equalizer cables
- Safety locks every 3"

Automatic arm restraints

UHMW polyethylene bearing system


Durable rubber lift pads

Dual hydraulic direct-drive cylinders

Adapter storage

Oversized A36 steel base plates

Single point safety release



FREE truck and van adapters come standard with all BendPak 2-post lifts

This is my BendPak



***There are many,
But this one's mine.***

"Here at Kindig-it Design we specialize in Bitchin' Rides and that takes killer equipment, that's why we use BendPak"

- Dave Kindig, Accomplished Designer specialized in Hot Rod Customs Owner of Kindig-it Design and star of TV's "Bitchin' Rides"

www.kindigit.com

BP BendPak®


For more information on BendPak's entire product line, call 1-800-253-2363 or visit www.bendpak.com

© 2016 BendPak, Inc. • BendPak, Inc is a registered trademark.

4-Post Light-Duty

SERIES FEATURES:

- Runways feature non-skid surface
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features 1-1/4" sheave axles
- Features heavy-duty 3/8" aircraft cable
- Internal "anti-sway" slider blocks in each column
- Electric / hydraulic power system
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 36" approach ramps available
- Durable powder coat finish
- Rugged steel construction
- High-speed lifting

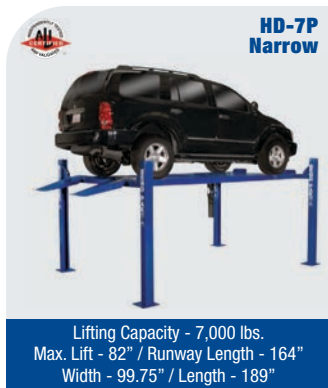

SPECIAL LIFT COLORS

Customize your BendPak lift with the color that best suits your garage or shop interior design. Classic **Blue** comes standard but for a nominal fee you can choose from optional Graphite **Black** or race-inspired Seca **Red**. Available on select models.



Graphite Black



Classic Blue



Seca Red



4-Post Light-Duty

SERIES FEATURES:

- Freestanding or bolt-down design
- Runways feature non-skid surface
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features 1-1/4" sheave axles
- Internal "anti-sway" slider blocks in each column
- Features heavy-duty 3/8" aircraft cable
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 36" approach ramps available
- Perfect for parking, storage and service



HD-9W
Wide Standard

Lifting Capacity - 9,000 lbs.
Max. Lift - 70" / Runway Length - 164"
Width - 110.25" / Length - 200"



HD-9ST
Narrow Standard

Lifting Capacity - 9,000 lbs.
Max. Lift - 70" / Runway Length - 164"
Width - 99.75" / Length - 200"



HD-9STX
Narrow Tall Long

Lifting Capacity - 9,000 lbs.
Max. Lift - 82" / Runway Length - 188"
Width - 99.75" / Length - 224"




HD-9XW
Wide Tall Long

Lifting Capacity - 9,000 lbs.
Max. Lift - 82" / Runway Length - 188"
Width - 110.25" / Length - 224"




HD-9XL
Wide Standard Long

Lifting Capacity - 9,000 lbs.
Max. Lift - 70" / Runway Length - 188"
Width - 110.25" / Length - 224"

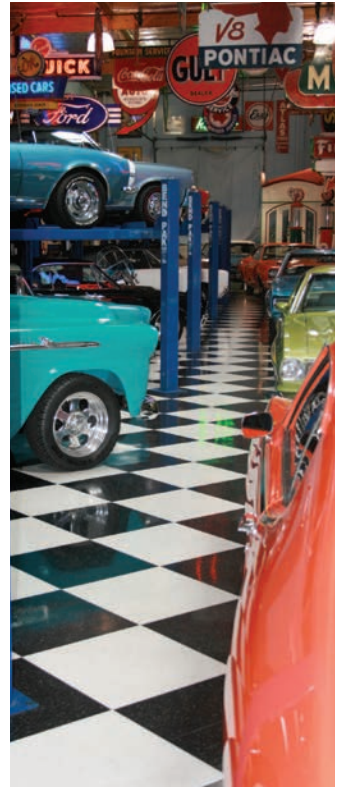

ACCESSORIES:




Jack Platform



Caster Kit



RBJ4500 Rolling Bridge Jack



Aluminum Deck



Drip Trays

**HD-9SW
Double Wide Standard**



Lifting Capacity - 9,000 lbs.
Max. Lift - 70" / Runway Length - 164"
Width - 202" / Length - 200"

**HD-9SWX
Double Wide Tall Long**



Lifting Capacity - 9,000 lbs.
Max. Lift - 82" / Runway Length - 188"
Width - 202" / Length - 224"



HD-9 Series

Oversize self-lubricating cable sheaves

Independent backup slack-cable safety latches

Optional rolling bridge jacks

Longer approach ramps

- Push button pneumatic safety release
- Electric/hydraulic power system
- Optional power unit locations

Adjustable lock ladders

Rugged 1-1/4" roller axles

- Heavy-duty 3/8" aircraft cables
- Multi-position safety locks



See it on the BendPak / Ranger YouTube Page

Options/Accessories

ACCESSORIES:




Jack Platform



Caster Kit



RJ-45 Rolling Bridge Jack



Aluminum Deck




Drip Trays




Caster Kit
Fits HD-7 & HD-9 Series



RBJ4500
Rolling Bridge Jack




JP-3 Jack Platform
(Bottle jacks not included)




JP-6 Jack Platform
(Bottle jacks not included)




WSA-100
Air Electric Work Station




Solid Aluminum Decks



Aluminum Approach Ramps



Extended Steel
Approach Ramps



Extended Aluminum
Approach Ramps

This is my BendPak

There are many,
But this one's ~~mine~~.
Ours

"Having BendPak lifts is a valuable asset to us. It helps us keep our cars the fastest in the nation. No matter what we're doing, BendPak is what we use."

- Bobby Ducote, Kye Kelley & Scott Taylor
& TV's "Street Outlaws-New Orleans"

BP BendPak®

For more information on BendPak's entire product line,
call 1-800-253-2363 or visit www.bendpak.com



4-Post Heavy-Duty

SERIES FEATURES:

- Adjustable runway widths
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features heavy-duty aircraft cable
- Runways feature non-skid surface
- Internal “anti-sway” slider blocks in each column
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Features heavy-duty sheave axles
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 48” approach ramps available
- Customizable power unit location



HDS-14 Standard

Lifting Capacity - 14,000 lbs.
Max. Lift - 70" / Runway Length - 199"
Width - 130" / Length - 241"



HDS-14X Extended Length

Lifting Capacity - 14,000 lbs.
Max. Lift - 70" / Runway Length - 229"
Width - 130" / Length - 271"



HD-14T Super Tall

Lifting Capacity - 14,000 lbs.
Max. Lift - 82" / Runway Length - 191"
Width - 126" / Length - 234"



HDSO-14 Open Front Plain Deck

Lifting Capacity - 14,000 lbs.
Max. Lift - 70" / Runway Length - 199"
Width - 143" / Length - 244"



HDS-27

Lifting Capacity - 27,000 lbs.
Max. Lift - 60" / Runway Length - 263"
Width - 154" / Length - 297"



HDS-27X

Lifting Capacity - 27,000 lbs.
Max. Lift - 60" / Runway Length - 323"
Width - 154" / Length - 357"



HDS-35X




HDS-35

Lifting Capacity - 35,000 lbs.
Max. Lift - 60" / Runway Length - 263"
Width - 154" / Length - 297"

ACCESSORIES:



Rolling Bridge Jack



DP-30 Rolling Oil Drain



Air / Electric Work Station



Rolling Bridge Airline Kit



HDS-35X

Lifting Capacity - 35,000 lbs.
Max. Lift - 60" / Runway Length - 323"
Width - 154" / Length - 357"



HDS-40


Lifting Capacity - 40,000 lbs.
Max. Lift - 60" / Runway Length - 263"
Width - 154" / Length - 297"



HDS-40X

Lifting Capacity - 40,000 lbs.
Max. Lift - 60" / Runway Length - 323"
Width - 154" / Length - 357"

HDS-18E Shown with rolling bridge jacks

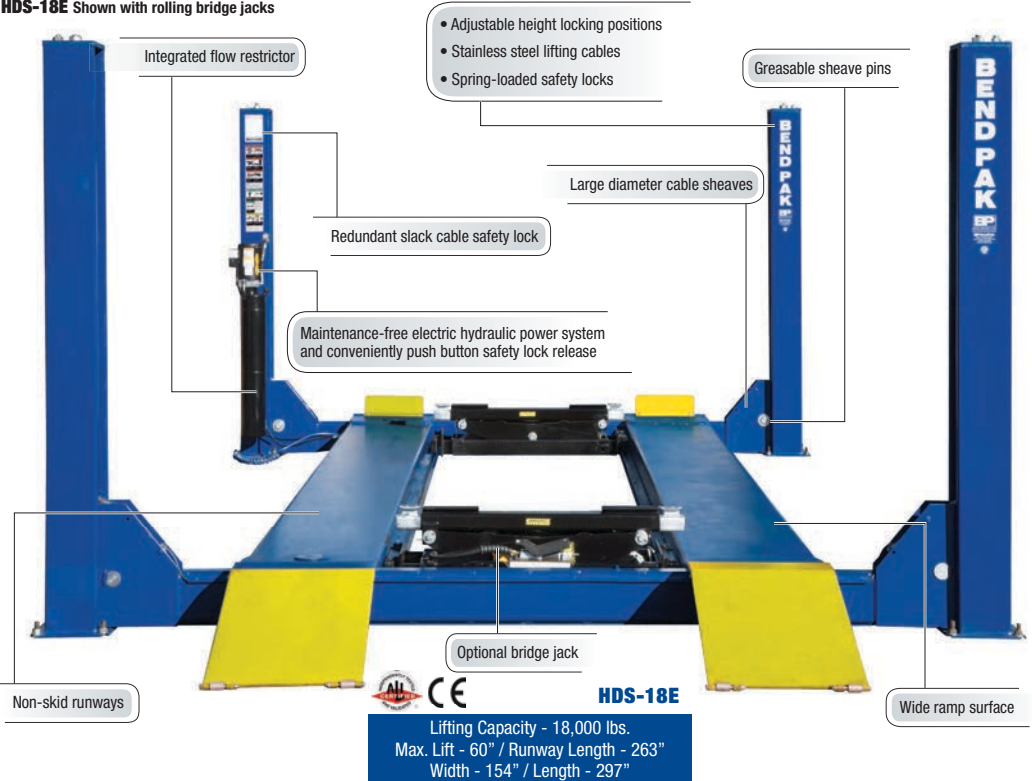

Alignment Lifts

SERIES FEATURES:

- Runways adjust to different widths
- Multi auto-level locking positions
- Single hydraulic cylinder
- Fully enclosed lifting cables and sheaves
- Pneumatic push-button safety release
- Heavy-duty aircraft cable
- Runways feature non-skid surface
- Self-lubricating cable sheaves
- Oversized sheave diameter
- Features heavy-duty sheave axles
- Fully adjustable lock stops
- Drive through ramps available
- Rolling bridge airline kit available
- Roll back kit available



Equipped with rear slip plates and galvanized front turn plates

CE

**HD-9AE
Standard**

Max. 2 Wheel Align. - 160" / Max. Lift - 70"
Capacity - 9,000 lbs. / Runway Length - 188"
Width - 127" / Length - 224"

CE

**HDS0-14LSX
Open Front**

Max. 2 Wheel Align. - 182" / Max. Lift - 70"
Capacity - 14,000 lbs. / Runway Length - 199"
Width - 143" / Length - 244"

CE

**HDS-14LSX
Extended Length**

Max. 2 Wheel Align. - 182" / Max. Lift - 70"
Capacity - 14,000 lbs. / Runway Length - 199"
Width - 130" / Length - 241"

CE

**HDS-14LSXE
Limo
Extended
Length**

Max. 2 Wheel Align. - 212" / Max. Lift - 70"
Capacity - 14,000 lbs. / Runway Length - 229"
Width - 130" / Length - 271"



CE

**HDS-18EA
Truck Alignment**

Max. 2 Wheel Align. - 271" / Max. Lift - 60"
Capacity - 18,000 lbs. / Runway Length - 263"
Width - 154" / Length - 297"

**NEED PARTS? WE HAVE THEM TOO.
CALL 1-805-933-9970**



Rolling Bridge Jacks

SERIES FEATURES:

- 4,500 - 25,000 lbs. lifting capacity
- Versatile drop in lifting pads
- Multi-piece adapter set standard
- High-pressure hydraulic power unit
- Stackable adapters
- Automatic safety locks
- Three safety-lock positions
- Rubber lifting pads or steel lifting pads come standard or optional
- Optional air-line kit
- Raise 2 or 4 wheels off the runways
- Telescoping roller design allows the runways to be adjusted for different tread widths



RBJ4500
Rolling Jack



Lifting Capacity - 4,500 lbs.
Lift Pad Reach - 41" - 57"
Frame Reach - 36" - 47"



RBJ6000
Rolling Jack



Lifting Capacity - 6,000 lbs.
Lift Pad Reach - 41" - 60"
Frame Reach - 36" - 47"



RBJ7000
Rolling Jack



Lifting Capacity - 7,000 lbs.
Lift Pad Reach - 41" - 60"
Frame Reach - 36" - 47"



RBJ9000
Rolling Jack



Lifting Capacity - 9,000 lbs.
Lift Pad Reach - 42" - 61"
Frame Reach - 45" - 50"



RJ-15
Rolling Jack



Lifting Capacity - 15,000 lbs.
Lift Pad Reach - 29" - 59"
Frame Reach - 46" - 59"



RJ-18
Rolling Jack



Lifting Capacity - 18,000 lbs.
Lift Pad Reach - 40" - 64"
Frame Reach - 45"



RJ-25
Rolling Jack



Lifting Capacity - 25,000 lbs.
Lift Pad Reach - 40" - 64"
Frame Reach - 45"




RBJ-4500

Quatra Scissors

SERIES FEATURES:

- 12,000 lbs. lifting capacity
- Extended runway design
- Durable powder coat finish
- Multi-position runway work steps
- Non-skid runways for sure grip
- Electric / hydraulic power system
- Integrated velocity fuses for cylinders
- Power console with simple controls
- Open center design
- Quad automatic safety locks with pneumatic push-button release
- Lubricated bearing on all pivot points
- Rugged steel legs
- Can be flush mounted or recessed
- Easy to use and understand
- High efficiency hydraulic power unit
- Equipped with rear slip plates and galvanized front turn plates
- Straight up vertical lifting
- Multi-position automatic leveling system
- Easy access to components for servicing

XR-12000A Alignment Lift

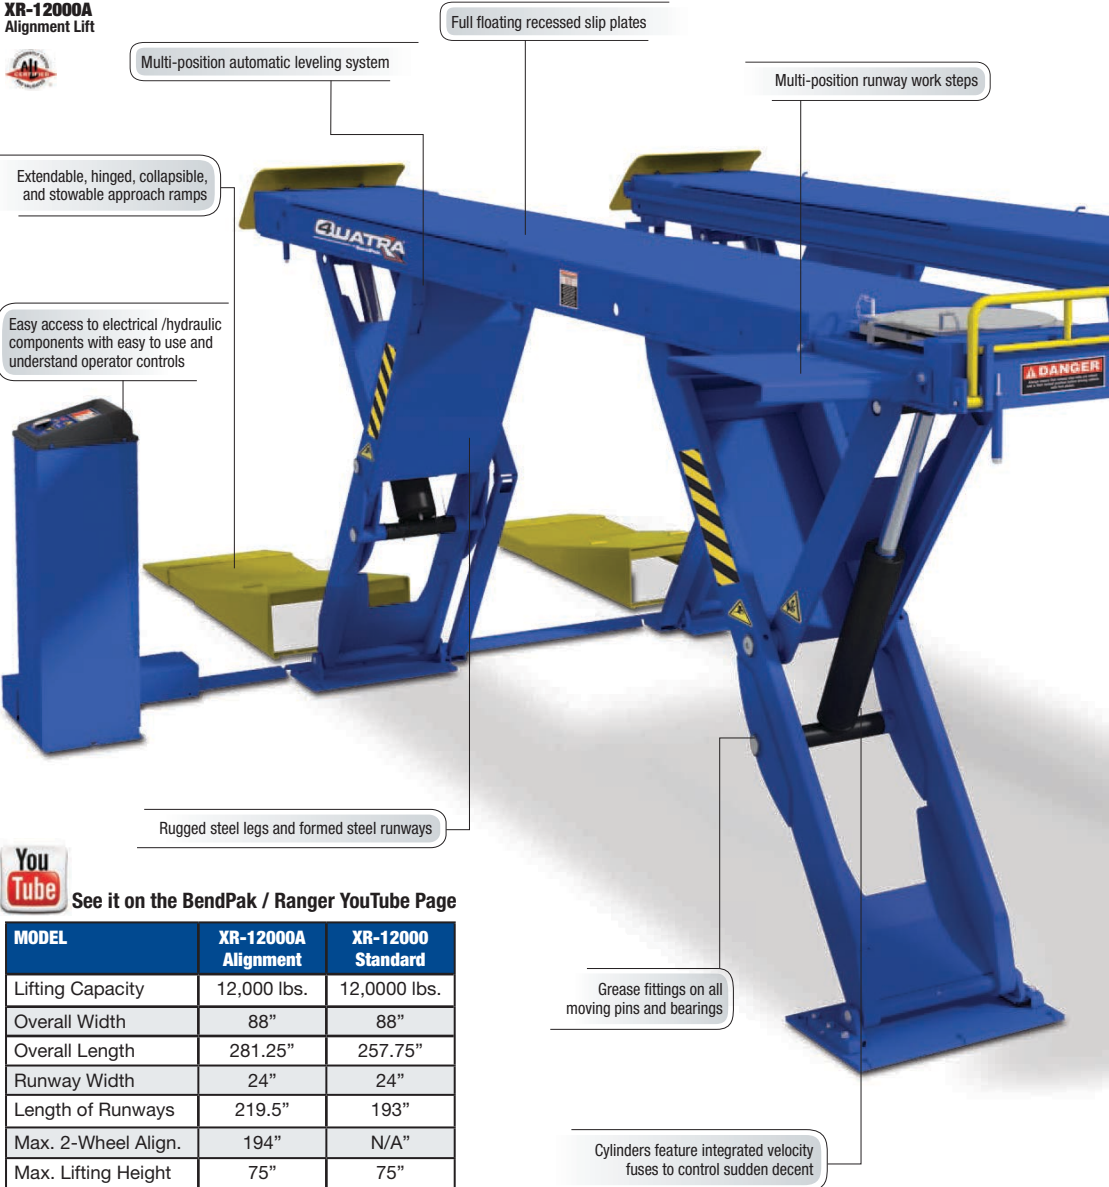


You Tube See it on the BendPak / Ranger YouTube Page

MODEL	XR-12000A Alignment	XR-12000 Standard
Lifting Capacity	12,000 lbs.	12,000 lbs.
Overall Width	88"	88"
Overall Length	281.25"	257.75"
Runway Width	24"	24"
Length of Runways	219.5"	193"
Max. 2-Wheel Align.	194"	N/A"
Max. Lifting Height	75"	75"

ACCESSORIES:



Rolling Bridge Jack



DP-30 Rolling Oil Drain



Air / Electric Work Station



Rolling Bridge Airline Kit



Optional RBJ6000 - 6,000 lb. capacity rolling bridge jack



XR-12000
Standard Deck



This is my BendPak

***There are many,
but this one's mine.***

"Keeping my shop working efficiently and safe during endless hours of filming and running a Mopar specialty shop is not easy. That's why I use the best tools and equipment money can buy. I am a true believer in BendPak because they build the best products and offer great service. My BendPak's are one part of my operation that I can truly depend on which allows me to focus on other parts of my business, like resurrecting the best Mopars on the planet."

- Mark Worman, Master of all things Mopar
Owner of Welby's Car Care Center and
star of TV's "Graveyard Carz"

BP BendPak®

For more information on BendPak's entire product line,
call 1-800-253-2363 or visit www.bendpak.com

© 2016 BendPak, Inc. • BendPak, Inc is a registered trademark.

BENDPAK



AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak

AMMO. OILS. LUBS.

BP BendPak


AMMO. OILS. LUBS.

Portable Column Lift

SERIES FEATURES:

- 18,000-lb. individual column capacity
- 108,000-lb. maximum system capacity
- SINGLE, PAIR or TEAM operation
- Three 30' cables are used leaving the front or back of the lift clear of cables
- Self-diagnostics and self-calibration
- Control systems feature 24-volt circuitry
- Variable height limit settings
- Two-speed lowering option settings
- Equipped with a warning light and audible alarm for critical warning alerts
- Emergency shut off's on each column
- Key lock enclosure on each column
- Electronics are multi-fuse protected
- Enclosed electric-hydraulic power system
- Pallet-jack style steering wheels
- Extended forks accommodate wide tires and deep wheel configurations
- Multi-width wheel forks with locking pins
- Tandem 8" diameter polyurethane covered steel wheels

PCL-18B

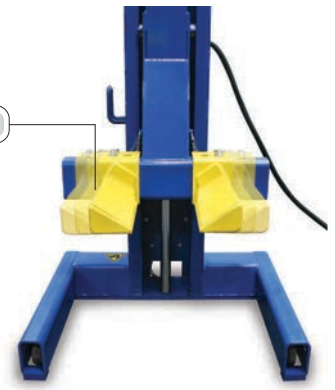

Column Capacity - 18,000 lbs.
System Capacity - 108,000 lbs.
Lifting Height - 71.5"

Low-Rise & Mid-Rise

STANDARD FEATURES:



MD-6XP Model
Multi Piece Adapter Set



SP-7X & All Low-Rise Models
1.5 inch Rubber Lift Blocks



Portable Models
Mobile Power Cart

LR-5T
Low-Rise



Comes standard
with 8 pc. adapter set

Lift Pad Dimensions - 24" x 53"
Capacity - 10,000 lbs.
Height Range - 4" - 22.75"

MD-6XP
Mid-Rise Portable



Comes standard
with adapter set

Adjustable Arms
Capacity - 6,000 lbs.
Height Range - 4.75" - 48"

MDS-6K
Mid-Rise Scissor



Comes standard
with rubber lift blocks

Lift Pad Dimensions - 19" x 58"
Capacity - 6,000 lbs.
Height Range - 5" - 45.5"

MD-6XP




MDS-6KF
Mid-Rise Scissor
Flush Mount



Comes standard
with rubber lift blocks

Lift Pad Dimensions - 19" x 58"
Capacity - 6,000 lbs.
Height Range - 5" - 45.5"

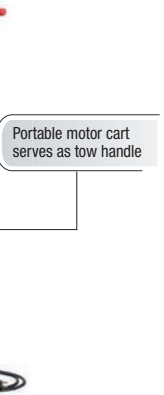


Portable motor cart
serves as tow handle

ACCESSORIES:




1.5" Rubber Lift Blocks



3" Rubber Lift Blocks



6" Rubber Lift Blocks



LR-4A Arm Kit



LR-60
Low-Rise

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 18" x 53"
Capacity - 6,000 lbs.
Height Range - 4" - 26"



LR-60P
Low-Rise Portable

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 18" x 53"
Capacity - 6,000 lbs.
Height Range - 4" - 26"



P-6B
Open Center Pit Lift

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 18" x 53"
Capacity - 6,000 lbs.
Height Range - 4" - 26"



P-6FB
Open Center Pit Lift
Flush Mount

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 18" x 53"
Capacity - 6,000 lbs.
Height Range - 4" - 26"



SP-7X
Full-Rise

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 21.5" x 63" - 70"
Capacity - 7,000 lbs.
Height Range - 5" - 68"



SP-7XF Full-Rise
Flush Mount

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 21.5" x 63" - 70"
Capacity - 7,000 lbs.
Height Range - 5" - 68"



P-9000
Low-Rise Pit Lift

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 23" x 53"
Capacity - 9,000 lbs.
Height Range - 3.5" - 21"



P-9000F
Low-Rise Pit Lift
Flush Mount

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 23" x 53"
Capacity - 9,000 lbs.
Height Range - 3.5" - 21"



Optional P-9000
Arm Kit

Capacity / Each arm - 1,125 lbs.
(4) Contact pads • (4) Sliding receivers
(4) 3" Stackable adapters

Parking & Storage

SERIES FEATURES:

Light-Duty

- Perfect for cars & light trucks
- Single hydraulic cylinder
- Dependable hydraulic design
- Easy operation & simple controls
- Electric / hydraulic power system
- Automatic safety locks

Heavy-Duty

- Wide base-plate for maximum stability
- Vehicle decks accommodate most passenger cars and light duty trucks.
- Heavy-duty steel construction
- Built-in wheel stops
- Two-position fail safe locking system



PLT-6S

Capacity - 6,000 lbs.
 Rise - 62.9" / Deck Length - 135"
 Width - 98.3" / Length - 153.5"

PL-7000XR

Capacity - 7,000 lbs.
 Rise - 85" / Deck Length - 157.5"
 Width - 98" / Length - 173.5"

PL-18000

Capacity - 6,000 lbs. Per Deck
 Overall Height - 364" / Deck Length - 155"
 Width - 114" / Length - 189"

PL-14000

Capacity - 7,000 lbs. Per Deck
 Overall Height - 280" / Deck Length - 137"
 Width - 119" / Length - 194"

PL-14000XL

Capacity - 7,000 lbs. Per Deck
 Overall Height - 280" / Deck Length - 157"
 Width - 119" / Length - 214"

PL-14000-20

Capacity - 7,000 lbs. Per Deck
 Overall Height - 234" / Deck Length - 137"
 Width - 119" / Length - 194"

PL-14000-18

Capacity - 7,000 lbs. Per Deck
 Overall Height - 210" / Deck Length - 137"
 Width - 119" / Length - 194"



GALLERY:



PL-7000XR

Minimum footprint allows multiple installations in limited space

- Overhead power unit provides smooth quiet hydraulic operation
- Power unit and controls integrated within the lift structure
- Automatic safety lock

Maintenance-free composite carriage bearings and self-lubricating chain rollers

Heavy-duty lifting chains

Wide deck platform accommodates pickups, vans, and cars

User-Friendly Controls

Wide-base plate mounts directly on ground or asphalt

Designed for installation on typical parking surfaces





This is my BendPak



**There are many,
But this one's ~~mine.~~
Ours**

"Here at Gas Monkey Garage we make the fastest, most badass hot rods around. That's why we use BendPak equipment to build our clients vehicles."

- Richard Rawlings & Aaron Kaufman
Gas Monkey Garage
& TV's "Fast N' Loud"

BP BendPak

For more information on BendPak's entire product line,
call 1-800-253-2363 or visit www.bendpak.com

© 2016 BendPak, Inc • BendPak, Inc is a registered trademark.

Pipe Benders

SERIES FEATURES:

- 3-1/2" Min. bending radius
- 5" Max. bending radius
- Canister style hydraulic filter
- 5 Hp / 208 - 230 VAC motor
- Manual or automatic controls
- Drop-in swaging collars
- Twist lock tooling
- ANSI 92.2 Cylinders
- Quick release bending dies
- Bending heads to within .002"
- Bending and end finishing operation
- Adjustable back gate pressure
- 180° bending capacity
- One piece solid steel barrel
- Direct drive high speed 4 GPM pump
- Tool trays
- Large fluid reservoir
- Filtered hydraulic system
- Oil sight gauges
- 1/2" high pressure hose
- Wide variety of tooling available



BB-1



Bending Controls - Manual
Clampless Swager - Internal Expander
BB-1 Die Package Available



**1302BA-202
1302BA-302**



Bending Controls - Digital Automatic
Clampless Swager - Internal Expander
202 or 302 Die Package Available

**BB-1 / 202
DIE PACKAGE**



BB-1 / 202 Economy Die Package
Bending and End Forming Tooling
Sizes - 1-1/2"- 1-3/4"- 2"- 2-1/4"- 2-1/2"



BB-2



Bending Controls - Manual
Clampless Swager - Internal Expander
BB-2 Die Package Available



**1302BAS-202
1302BAS-302**



Bending Controls - Semi-Automatic
Clampless Swager - Internal Expander
202 or 302 Die Package Available

**BB-2 / 302
DIE PACKAGE**



BB-2 / 302 Economy Die Package
Bending and End Forming Tooling
Sizes - 1-1/2"- 1-3/4"- 1-7/8"- 2"- 2-1/4"- 2-1/2"



ACCESSORIES:



Specialty Tooling
Available Upon Request



300-1 Die Package



300-2 Die Package



Card System CD




Rotation Dial



BAS Semi-Automatic Controls

BB Series / 1302 Series
Top View

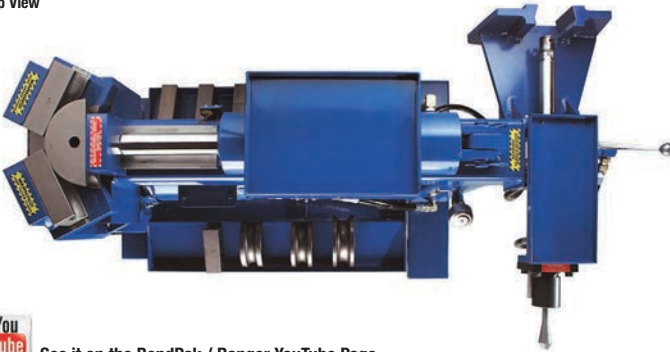

BA Digital Automatic Controls



See it on the BendPak / Ranger YouTube Page

Air Compressors

SERIES FEATURES:

- 80 & 120 Gallon vertical tank
- 4-Cylinder / 2-stage pump
- ASME rated tank
- Electric mag-starter
- Fan-type flywheel
- Fully-enclosed belt guard
- Tapered roller bearings
- Forged ductile iron crankshaft
- Corrosion resistant tubing for coolers, separators and valves.
- 100% cast Elite pump
- Cast iron cylinders and heads with deep cooling fins
- Forced-air after cooler
- Oil sight gauge
- Automatic pressure switch
- ASME rated overload pressure safety valve
- Pressure gauge with valve
- Oversized replaceable air filters
- Automatic start / stop

5 HP MODEL



TS-580V-601 / 208-230 V / 60 Hz / 1 Ph
Horsepower - 5 Hp
Maximum CFM - 17.2 / 175 psi
Tank - 300L / 80 Gal / Vertical

7.5 HP MODEL



VMX-7580V-601 / 208-230 V / 60 Hz / 1 Ph
Horsepower - 7.5 Hp
Maximum CFM - 26.5 / 175 psi
Tank - 300L / 80 Gal / Vertical

10 HP MODEL



VMX-10120V-603 / 208-230 V / 60 Hz / 3 Ph
Horsepower - 10 Hp
Maximum CFM - 35 / 175 psi
Tank - 454L / 120 Gal / Vertical

CE ANSI

Extreme-duty four-cylinder cast iron pump

Electric Motor with cooling fan

Protective pulley cover

Air cooling assembly



Elite Series
BY **BendPak**

The 100% cast-iron V-Max Elite pump features splash lubrication for total reliability and a V-4 finned cylinder configuration that provides 360° cooling. Heavy-duty, disc-type valves are dependable and accessible without having to remove the cylinder head or performing other complicated valve maintenance procedures. The large V-Max pump puts out a lot of air with little noise due to a slower RPM speed and two-stage design. A built-in inter-cooler and air-cooled aftercooler chills the air resulting in reduced heat and condensation moisture.


ACCESSORIES:



Moisture Minder®



Moisture Minder® Kit



Anti-Vibration Pads

HUSH^{Quiet}


CE
ANSI

RS7580H-603 Rotary-Screw Air Compressor

Power Requirements:
208-230 V AC / 60 Hz / 3 Ph
Horsepower - 7.5 Hp
Maximum CFM - 21.3 / 150 psi

STANDARD FEATURES:

- Variable speed drive controls with timed shutdown
- Hush-Quiet super silenced insulated enclosure
- Fully open access doors for easy service
- Auto-dual control energy saver
- Spin on oil filter
- Heavy duty inlet filter
- Twin toothed drive belts provide greater durability and more efficient power transmission
- Precision-aligned, high-quality roller bearings designed to withstand the most demanding conditions and extend service life.
- Asymmetric rotary screw with oil injection
- Compact design
- Phase protection-safety feature
- Dual filtration
- Spin on oil separator
- Air cooled after cooler
- Metal cabinet features sound proof panels with washable high density foam
- Efficiency and reliability are designed into the asymmetric profile screw set with excellent inlet flow characteristics.

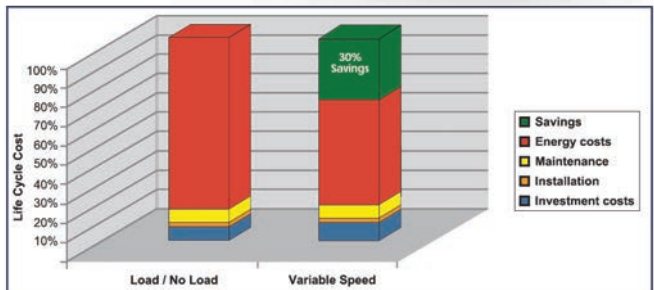

Value over a period of 5 years

Reduced Long Term Operating Costs

Energy costs are a significant portion of any compressed air system's total lifetime cost. In fact, the amount of energy required to run a compressor for just one year can exceed the compressor purchase price. Over a period of 10 years, energy normally totals 70% of the overall costs.

Power Units



Ranger™ AC hydraulic power-units are self-contained, dependable sources of hydraulic power that come standard with an abundance of features and benefits in a durable and economic package. These high quality power units are ideal for industrial AC applications such as auto lifts, man lifts, elevated work platforms, scissor lifts, dock levelers, conveyors, packaging machines, machine tools, compactors, crimping machines, presses, robotic equipment, tailgate lifts, dump bodies, cab tilts, emergency backup units, snowplows, log-splitters, harvesting machinery, lift platforms, scaffolds, presses, waste compactors, car lifts, medical field and dental field lifts, and more.

E0.2B8F1 Power Unit



Gal Reservoir - 1.6 / PRV - 1900
Motor - 1.5 HP / 110-230V-50/60-1PH
UL/ETL Listed

E1.2B8F1 Power Unit



Gal Reservoir - 1.6 / PRV - 2500
Motor - 1.5 HP / 110-230V-50/60-1PH
CE Listed

- FEATURES:**
- UL / ETL Listed (except model E1.2B8F1)
 - Vertical Design
 - Built-in throttle and buffer valves reduce pre-load pressure
 - Integrated fixed-setting pressure relief valve
 - Submerged pump
 - Spare pressure port
 - Multi-hole adapter plate adapts to a wide variety of mounting applications
 - Suction-strainer
 - Breather and fill-cap
 - Hardened-allow pump end plates for unmatched durability in demanding environments and severe duty applications

E2.1F3H1 Power Unit



Gal Reservoir - 3.6 / PRV - 2650
Motor - 2.5 HP / 110-230V-50/60-1PH
UL/ETL Listed

F2.1F3H1 Power Unit



Gal Reservoir - 3.6 / PRV - 2850
Motor - 2.5 HP / 208-230V-50/60-1PH
UL/ETL Listed

F3.2G3H1 Power Unit



Gal Reservoir - 4.2 / PRV - 2650
Motor - 2.5 HP / 208-230V-50/60-1PH
UL/ETL Listed

E3.7K3H2 Power Unit



Gal Reservoir - 8.5 / PRV - 2400
Motor - 2.5 HP / 208-230V-50/60-1PH
UL/ETL Listed



QuickJack

QUICKJACK™

The QuickJack was developed specifically to address the shortcomings that have plagued the race circuit and DIY market for decades. Getting cars off the ground shouldn't be such a chore. Wasting time getting cars in the air means less time wrenching, and at the track seconds separate winners from losers. The QuickJack portable lifting system makes vehicle maintenance on the track and off convenient and lightning fast. The QuickJack can go anywhere and can be easily stowed in the trunk or back seat of most cars when not in use. Bring it to the track or drop it on your garage floor to perform routine maintenance in the comfort of your home, all in seconds. For more details visit www.quickjack.com. PATENTED. All Rights Reserved.



BL-3500SLX



Choice of AC or DC portable power unit

Capacity - 3,500 lbs. / Pair
Height - 3" - 20" / Lifting time - 15-30 sec.
Individual Frame Weight - 60 lbs.



BL-5000SLX



Choice of AC or DC portable power unit

Capacity - 5,000 lbs. / Pair
Height - 3" - 21" / Lifting time - 15-30 sec.
Individual Frame Weight - 76 lbs.



BL-7000SLX



Choice of AC or DC portable power unit

Capacity - 7,000 lbs. / Pair
Height - 3.5" - 21.5" / Lifting time - 15-30 sec.
Individual Frame Weight - 91 lbs.

SUV & Light Truck Adapter Set



(4) Low-profile round contact pads
(4) Sliding receivers
(4) 3" Stackable adapters

Includes:

(2) Ea. Jack Frame Assemblies

(1) Ea. Mini Hydraulic Power Unit
110V-AC Standard
Includes pendant control
(Optional 12V-DC available)



(2) Ea. 150" Hydraulic Hoses
(2) Ea. 14" Aux. Hoses

(4) Ea. 1.5" x 3" x 4" Rubber Blocks
(4) Ea. 3" x 3" x 4" Rubber Blocks

(2) Ea. Quick-Mount Handles



SUV & Light Truck Adapters



See it on the BendPak / Ranger YouTube Page

Tire Changers

Ranger's NextGen™ Tire Changers - Tire Shop Tested™

NextGen™ SERIES

All NextGen models are loaded with design enhancements that make the technician's job easier. Sturdy frames, rigid 45mm hexagonal vertical shafts, and hardened-steel horizontal outrigger support arms eliminate flex during all tire service procedures reducing the chance of damage to expensive wheels. Bead seating and tire inflation is simple and effortless with Ranger's exclusive TurboBlast™ portable bead seating system. High-torque electric turntables, increased speed and reversible direction means quicker tire removal and installation. Industrial-grade pneumatic control valves feature die cast and machined bodies constructed from zinc and aluminum for increased service life and performance at the highest level possible within almost every imaginable working condition. Important wheel service accessories come standard like a large soap bucket with brush and a multi-piece plastic wheel protector kit that includes turntable jaw covers, bead-breaker blade boots and specialized mount / demount head covers to help protect delicate wheels.



R745
Swing-Arm
Tire Changer

Internal Clamping - 12" - 21"
External Clamping - 10" - 18"
Maximum Tire Diameter - 36"



R76LT
Tilt-Back
Tire Changer

Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 43"



R980AT/ATF
Swing-Arm
Power Assist

Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 50"



R980XR/XRF
Swing-Arm
Tire Changer

Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 50"



R980NX/NXTF
Swing-Arm
Power Assist

Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 50"



R76ATR/ATRF
Tilt-Back
Power Assist

Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 43"



R30XLT/XLTF
Swing-Arm
Power Assist

Internal Clamping - 12" - 32"
External Clamping - 11" - 30"
Maximum Tire Diameter - 50"



R80DTXF
Leverless
Tire Changer

Internal Clamping - 12" - 32"
External Clamping - 11" - 30"
Maximum Tire Diameter - 47"



R26FLT
Truck Tire Changer

Drive System - Electric / Hydraulic
Maximum Rim Diameter - 14" - 26"
Maximum Tire Diameter - 63"

ACCESSORIES:



**Truck Cone Kit
RWS-1TC-1**



**Light & Medium Trucks
Adapter Set**



**Wheel Protector Kit
Comes Standard**



**Reduction /
Extension Clamps**



**RWL-150T Wheel Lift
Fits R980XR/NXT & R30XL**

**R80DTXF
Leverless
Tire Changer**



NextGen™ SERIES

See it on the BendPak / Ranger YouTube Page



Wheel Service

Optional Truck Adapter Kit

Our super-duty truck tooling package for Ranger brake lathes consists of an upgraded 1-7/8" arbor and a wide variety of adapters. This enormous set allows you to expand the coverage to handle virtually any vehicle through 1-ton trucks. Fits Ranger brake lathes with 1" arbor



Brake Lathe Truck Adapter Kit

Fully Equipped Multi-Piece Set
Accommodates Medium &
Full Size Trucks

RV-80L / H FEATURES:

- Simple, one-man operation
- Heats tread, shoulder and sidewall
- Cures the patches and inner tire lining
- Rotating adjustable frame
- Adjustable height tower
- Contoured inner and outer curing heads
- Available in low and high voltage



Heated Tire Repair / Tread & Sidewalls
Rotating Adjustable Tower
Dimensions - 57" x 22" x 14"

TS-150 FEATURES:


- Adjustable height tire spreader
- Air-powered
- Perfect for tire inspection and repair
- Heavy-duty rollers allow tires to rotate freely
- Heavy steel construction
- Wide-base design for stability
- Powder coat finish



TS-150 Tire Repair Wheel Lift

Wheel Lift Tire Spreader
Adjustable Height Lifting
Adjustable Spreader Forks

RL-8500 / RL-8500XLT (not pictured) Combination Brake Lathe Package

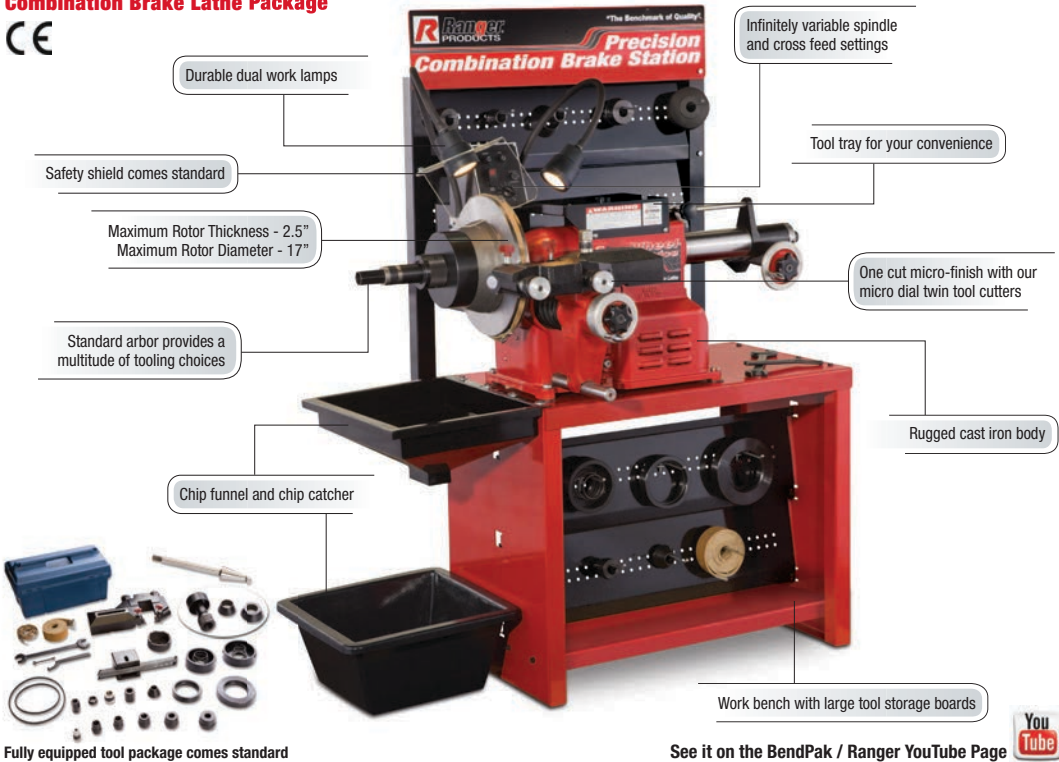

Durable dual work lamps

Safety shield comes standard

Maximum Rotor Thickness - 2.5"
Maximum Rotor Diameter - 17"

Standard arbor provides a
multitude of tooling choices

Chip funnel and chip catcher

Infinitely variable spindle
and cross feed settings

Tool tray for your convenience

One cut micro-finish with our
micro dial twin tool cutters

Rugged cast iron body

Work bench with large tool storage boards

Fully equipped tool package comes standard

See it on the BendPak / Ranger YouTube Page



DST-2420 FEATURES:

- Dynamic, Static, and Performance Alloy settings
- Automatic round-off with top-dead-center weight position indicator
- Hardened-steel 36-mm shaft
- Quick-release hub nut
- Multi-user save function

DST64T FEATURES:

- Precision DataWand™ and inner data arm
- Low RPM balancing speed and rapid six-second cycle time
- Automatic braking
- LED inner wheel target light
- Manual or automatic start
- Self calibration function

RB24T FEATURES:

- An ergonomic control board and easy-to-read LED display
- Highly precise 64-bit architecture
- Perfectly balanced vibration-free counter weighted flywheel belt drive
- Auto-stop function, electromagnetic pulse combined with pneumatic braking



DST-2420
Wheel Balancer

Max. Wheel Diameter - 10" - 30"
Max. Tire Diameter - 47"
Max. Tire Weight - 145 lbs.



DST-64T
Wheel Balancer with
DataWand™ Entry

Max. Wheel Diameter - 10" - 30"
Max. Tire Diameter - 50"
Max. Tire Weight - 150 lbs.



RB24T
Truck Wheel Balancer

Max. Wheel Diameter - 30"
Max. Tire Diameter - 50"
Max. Tire Weight - 400 lbs.

3DP4100 Target 3D Pro™ 3D Imaging Wheel Aligner

Power Requirements: 115V / 1Ph, 50/60 Hz /
8 amp-230V / 1Ph, 50/60 Hz / 8 amp



Jacks & Lifting

INFORMATION:

Ranger's wide-array of multi-purpose floor jacks just keeps getting larger and more diverse. Our current line of floor jacks has maximum capacities ranging from 2,000 to 55,000 lbs. and come in a variety of styles like quick-pump and low-profile. No matter which one you choose, Ranger floor jacks offer incredible lifting power and top notch construction that you can count on to never let you down. Our impressive line of floor jacks is carefully designed to accommodate a wide spectrum of weight capacities and lifting applications, easily lifting just about anything that needs service.



RFJ-3000AL



Capacity - 3,000 lbs.
Height - 3.5" - 17.5"
Chassis Length - 24"



RFJ-3000LPF



Capacity - 3,000 lbs.
Height - 2.75" - 24"
Chassis Length - 34"



RFJ-4000AL



Capacity - 4,000 lbs.
Height - 3.5" - 17.75"
Chassis Length - 24"



RFJ-2TX



Capacity - 4,000 lbs.
Height - 3.5" - 31.5"
Chassis Length - 37"



RFJ-5000HD



Capacity - 5,000 lbs.
Height - 3" - 20"
Chassis Length - 28"



RFJ-3000LPF



RFJ-3TP



Capacity - 6,000 lbs.
Height - 5.25" - 19.25"
Chassis Length - 26"



RFJ-3TQP



Capacity - 6,000 lbs.
Height - 5" - 19.75"
Chassis Length - 25.5"



RFJ-6HD



Capacity - 6,000 lbs.
Height - 3.625" - 21"
Chassis Length - 27"

GALLERY:



CE

RFJ-3T

Capacity - 6,000 lbs.
Height - 4.75" - 20.5"
Chassis Length - 28"



CE

RFJ-10TL

Capacity - 20,000 lbs.
Height - 7" - 23"
Chassis Length - 61"



CE

RBJ-30TL

Capacity 1st Stage - 60,000 lbs.
Capacity 2nd Stage - 30,000 lbs.
Height - 6" - 12" / Chassis Length - 22.5"



CE

RTJ-1100

Capacity - 1,100 lbs.
Height - 45" - 72"
Base - 24" x 24"



CE

RTJ-1

The original
TransJack

Capacity 1st Stage - 2,000 lbs.
Capacity 2nd Stage - 1,000 lbs.
Height - 37" - 73" / Base - 39" x 39"



CE

RTJ-3000

Capacity 1st Stage - 3,000 lbs.
Capacity 2nd Stage - 2,000 lbs.
Height - 35.5" - 71.5" / Base - 34" x 34"



RFJ-4000AL

Jacks & Lifting

SERIES FEATURES:

- Welded steel construction for maximum durability
- Safety ratchet design assures stands remain locked under load
- Perfect for holding drive-train or exhaust components in position
- Sold in pairs
- Quick adjust spin handle with thrust bearing
- Wide base provides maximum stability
- Thick, rubber adjustable pad for maximum support
- Convenient handle and column release
- Hardened ACME screw for easy adjustment
- Tripod design evenly distributes weight
- Pneumatic operated wheel lift
- One-handed, lever controlled
- Heavy-duty steel casters
- Bearing mounted slider
- Stabilizes vehicles raised on lifts
- Heavy-steel construction for maximum durability



RJS-3T

Holding Capacity - 6,000 lbs.
Height - 11.5" - 17"
Base Dimensions - 7" x 7.5"



RJS-6T

Holding Capacity - 12,000 lbs.
Height - 15.5" - 24.5"
Base Dimensions - 9" x 10.5"



RJS-12T

Holding Capacity - 24,000 lbs.
Height - 20" - 30.5"
Base Dimensions - 14.5" x 13"



**RJS-1T
High Reach
Jack Stand**

Holding Capacity - 1,650 lbs.
Height - 53" - 79"
Base Dimensions - 12"



**RJS-1TF
High Reach
Jack Stand
Foot Operated**

Holding Capacity - 1,650 lbs.
Height - 53" - 79"
Base Dimensions - 12"



**RJS-2TH
Tripod
Jack Stand**

Holding Capacity - 4,000 lbs.
Height - 68" - 76"
Base Dimensions - 24" x 24"



**MLS-18
Mobile
High-Lift
Jack Stand**

Holding Capacity - 18,000 lbs.
Height - 48.75" - 74.5"
Base Dimensions - 32"



RWL-150T

Lifting Capacity - 150 lbs.
Pneumatic Operation
Fits R980XR/NXT & R30XL



Motorcycle Lifts

SERIES FEATURES:

- Constructed out of 12-gauge steel
- Pneumatic lifting cylinder
- Durable powder-coat finish
- Adjustable front wheel vise
- Drop-away rear wheel deck
- Easy ramp(s) removal
- Front and side extensions standard
- Built-in retractable swivel casters
- Full travel automatic safety locks
- Single hydraulic lifting cylinder
- Side decks can be easily removed
- Diamond-plate approach ramps
- Air or hydraulic pump operation
- Multiple locking positions



RML-600XL

Lifting Capacity - 1,000 lbs.
Height - 7" - 31.5" / Table Width - 24" - 44"
Table Length - 79" - 98"



**RML-1500XL
Super Stretch**


Lifting Capacity - 1,500 lbs.
Height - 7" - 45" / Table Width - 30" - 53"
Table Length - 89" - 102"



RML-1100

Lifting Capacity - 1,100 lbs.
Height - 3.5" - 16"
Top Dimensions - 6" - 17.75"

**RML-1500XL
Super Stretch**

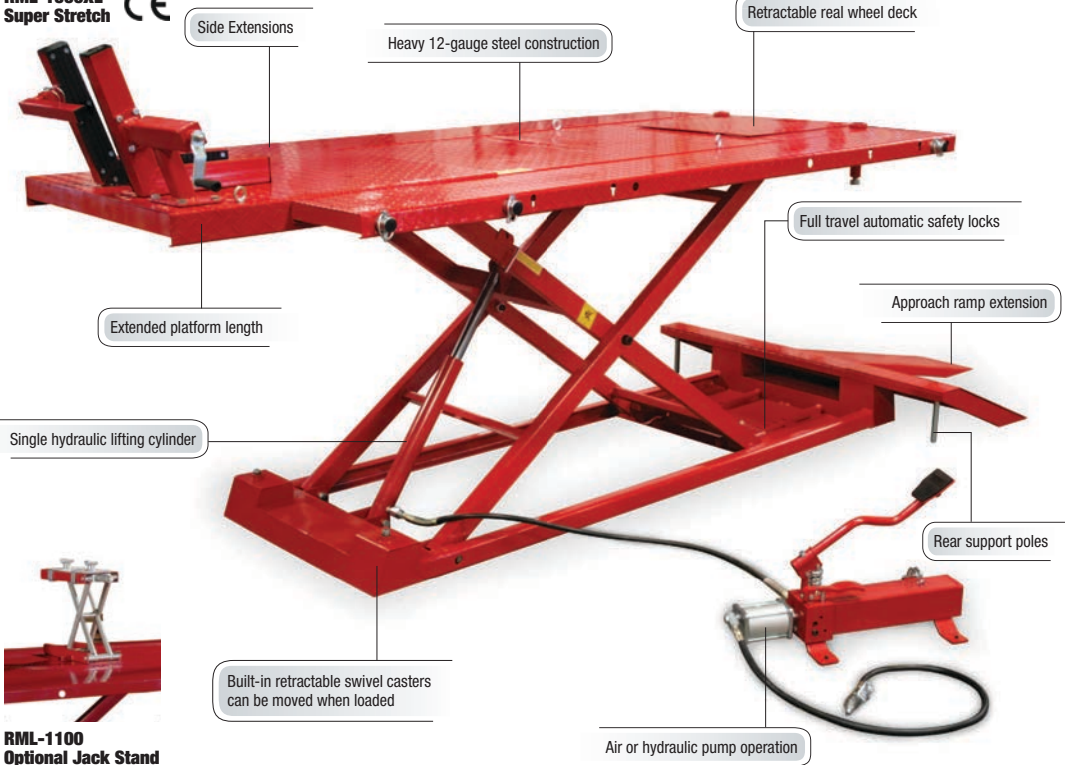

**RML-1100
Optional Jack Stand**

Shop Equipment

INFORMATION:

Let Ranger Products lighten the load with our considerable line of high-quality rolling equipment. All Ranger Carts and Dollies are made from high-gauge steel and employ only the best casters for easy maneuvering. Our service carts, chassis-mount vehicle dollies, low-profile automobile carts and rolling adjustable work tables come fully equipped to make your day in the garage infinitely easier. Don't lift or carry—roll with Ranger!

Ranger's industrial shop presses offer you the versatility of professional-grade hydraulic force, whether you're at the shop or in your own garage. Among other operations, all Ranger Hydraulic Presses are ideal for the removal and installation of gears, bushings and bearings—so you can bend, straighten, flatten, crush, press, shape, push, pull, lift and spread like you were born doing it.



**RCD-1TD
Auto Carts**



Capacity - 1,000 lbs. (Each)
Dimensions - 15.5" x 23.5"
3.5" Cast Iron Ball Bearing Casters



**RCD-2V
Vehicle Dolly**



Lifting Capacity - 4,400 lbs. (Each)
Overall Height - 13.5"
Caster Size - 4.5"



**RP-20T
Bottle Jack
Shop Press**



Capacity - 40,000 lbs.
Cylinder Stroke - 8"
Width - 23" / Height - 59"




**RCD-1500
GoCart™
Vehicle Dolly**



Load Rating Each - 1,500 lbs.
Wheel Size Capacity - 8" - 24"
Tire Diameter Capacity - 15" - 28"



**GoCart™
Storage Rack**



Load Rating - 200 lbs.
Dimensions - 19" x 31" x 6"
Holds up to 4 GoCart™ Dollies




**RP-20HD
Hydraulic
Shop Press**



Capacity - 40,000 lbs.
Cylinder Stroke - 5.5"
Width - 37" / Height - 60.25"

RCD-1500

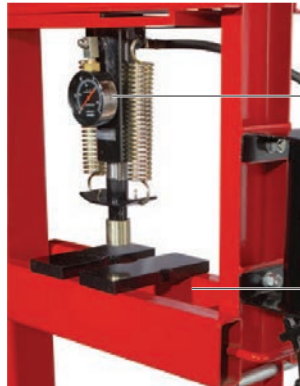

Integrated 4" diameter
20-ton pressure gauge

Hydraulic cylinder moves laterally

Adjustable table height

RP-20HD

RWB-2D FEATURES:

- Electrostatic triple-baked protective powder coat
- Rolled edges for added strength and rigidity
- Full-extension ball bearing drawer slides
- Tumbler key-lock pivot drawer latching system

RWB-2S FEATURES:

- Glossy red finish
- Electrostatic oven-baked powder coat
- Rolled edges for added strength and rigidity
- 5/32" HD rolled edge steel table top
- 3/32" HD rolled edge steel shelves
- 12-gauge construction

RWB-1TD FEATURES:

- Lockable heavy-duty drawer
- 500-lb. working capacity
- Heavy-duty 4" casters
- Adjustable working height
- Removable polyethylene fluid drain
- 14-gauge table top
- 3/4" liquid containing rim



RWB-2D 2-Drawer Work Bench



Height - 34.5"
Width - 59"
Depth - 25.25"



RWB-2S 2-Shelf Work Bench



Height - 34.5"
Width - 79"
Depth - 25.25"




RWB-1TD Work Bench w/Fluid Catcher



Height - 40"
Width - 48"
Depth - 32"



RH-50PL Hose Reel



Air Pressure - 300 psi
Hose Length - 50'
Fittings - 3/8"

RH-50PL


Use for air or water

4-direction, non-sag rollers

Anti-lock out ratchet mechanism prevents reel from locking up when hose is fully extended

Solid brass swivel fitting

Wall, floor, or ceiling mount with a 7" x 8" reinforced mounting base



Shop Equipment

SERIES FEATURES:

Oil Drains

- Lightweight for easy portability
- Safe and easy to use
- Non-corrosive telescoping tube
- Heavy-duty stainless steel clamp
- Built-in hand grips
- Durable steel construction

- Tough construction will resist dents, rust, and corrosion
- Rugged funnel with built-in contamination screen

Oil Filter Crushers

- Reduces cans up to 20%
- Reduces filters up to 25%

- Crushes cans in only 15 seconds
- 100% air operated
- Fulfills EPA and other mandated environmental standards
- Removes up to 95% of the oil
- Compact floor or bench-mount design
- All-steel industrial construction



RD-9G Capacity - 9 gal.
Height - 32" - 64"
Funnel Diameter - 16.75"

RD-18G Capacity - 18 gal.
Height - 48" - 72"
Evacuation Pump



RD-15 Capacity - 15 gal.
Height - 8.5"
Shipping Weight - 52 lbs.



RD-20SE Capacity - 20 gal.
Height - 52" - 83"
Funnel Diameter - 16"



RP-20FCS Stand
Capacity - 230 lbs.
Unit Weight - 72 lbs.
Dimensions - 27.75" x 42" x 17.75"



RP-20FC Oil Filter Crusher
Capacity - 10 Ton / Cycle Time - 15 - 20 sec.
Air Requirements - 125 - 175 psi
Dimensions - 17" x 29.5" x 17"



RP-50FC Super Duty Oil Filter Crusher
(Stand Included)
Capacity - 25 Ton / Cycle Time - 8 - 15 sec.
Power Supply - 208-230V / 60Hz / 1 Ph
Dimensions - 90" x 32.5" x 31.5"



RP-20FC with stand



See it on the BendPak / Ranger YouTube Page

RS-500 / RS-750 FEATURES:

- Heavy-duty steel construction
- Removable tank screen
- Stainless oil skimmer
- Removable parts tree
- Powder coat finish
- Brass nozzles
- Full opening octagonal door
- Large drain pipe
- Heavy-duty rubber casters
- Friction-drive turntable system
- Gasket-free door
- Small parts basket
- Stainless steel handles
- Free bucket of soap included

SOAP FEATURES:

- Non-foaming soap
- Low pH
- Mild alkali
- Water soluble
- Specially formulated
- Removes grease, oil, stains, carbon, protein, and some paints



RS-750



 See it on the BendPak / Ranger YouTube Page

Shop Equipment

SERIES FEATURES:

Bubble Balancer

- Rugged die-cast aluminum head cone
- Easy to use self-leveling stand
- Built-in weight-storage compartments
- Self-aligning, spring-loaded cone
- Hardened cast pivot seat
- Recessed circular level bubble

Rolling Work Seat

- Padded center cushion and headrest
- Swivel casters for easy maneuverability
- Relieves sore back muscles
- Work more efficiently
- Sturdy steel tubing construction
- Low profile design

Portable Evaporative Air Cooler

- Micro-computer programmed control panel with LCD display
- Automatic swing-louvers
- Direct-drive fan
- Convenient remote control
- 3-speed airflow wind speed



RWS-1B
Bubble Wheel
Balancer

Hub Hole Diameter - 1.5" - 4.5"
Calibrated at - 90°- 180°- 270°- 360°
Width - 12" / Height - 23"



RST-1WS
Rolling Work Seat

Steel Tubing - 1"
Swivel Casters - 2.5"
Relieves sore back muscles



CB-30L
Portable Evaporative
Air Cooler

Fan Diameter - 30"
Max. Airflow - 10595 CFM
Power Supply - 115V / 60Hz / 1 Ph



RWS-3TC
Manual Tire Changer

Tire Capacity - 8" - 7.5" x 16"
Wheel Plate Diameter - 7.5"
Base Dimensions - 15" x 18"



Steel Wheel Weights
(Silver or Black)

5g (.18oz) ea.
600 Pcs. Per Roll
Strong Adhesive Backing

RWS-1B



RST-500ES FEATURES:

- Adjusts to fit all vehicles
- Rubber foot pads to hold load securely
- Straddles inner fender wells
- Precisely positions engine for easy gear box and transmission removal
- Perfect for 4 and 6 cylinder engines
- 1,500 lb. capacity

RES-1TF FEATURES:

- Folds upright to conserve space
- Heavy steel construction
- Long rubber-grip handle
- Head swivels 360° for easy positioning
- Heavy-duty swivel casters
- Slotted adjustable saddle permits
- Neck is reinforced for extra strength

RSC-2TF FEATURES:

- Designed for shops with limited space
- Folds for easy storage
- Heavy-duty steel casters
- Neck is reinforced for extra strength
- Wide base for maximum stability
- Telescoping boom provides 4 positions
- Heavy steel construction



RST-500ES Engine Support



Holding Capacity - 1,500 lbs.
Screw Travel - 13"
Adjustable Width - 40" - 63"



RES-1TF Engine Stand




Holding Capacity - 2,000 lbs.
Front Width - 31" / Rear Width - 27.5"
Height - 37.5" / Length - 41"



RSC-2TF Folding Shop Crane



Boom Length - 40" - 63"
Boom Capacity - 1,100 - 4,400 lbs.
Boom Height - 80" - 93"

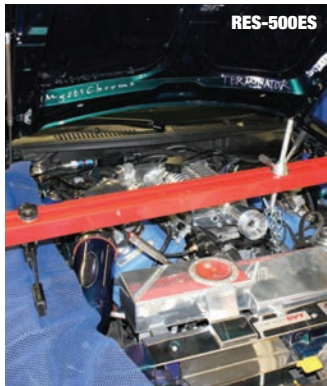

RST-500ES



RES-1TF




RSC-2TF

Manufacturing Superiority

BendPak recognizes the manufacturing process as our moment of maximum influence. When we ship a piece of equipment, we need to know that the product that left our manufacturing complex was the best it could be. That's why we demand nothing short of the very finest in facilities and machinery. Our primary factory houses development and manufacturing for medium and heavy-duty lifting products and wheel service models. At just over 300,000 square foot it's a facility designed for maximum efficiency and safety, where we employ the best steel fabrication techniques in the world.

Main Production Facility

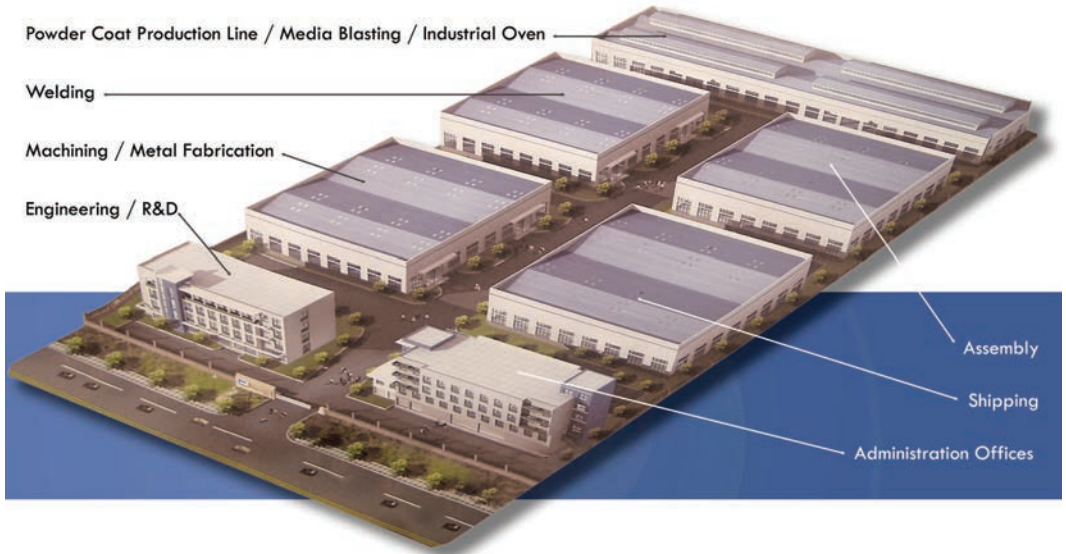

MEDIUM AND HEAVY-DUTY PRODUCTS

BendPak's second mega-sized manufacturing is used primarily for manufacturing light and medium duty lift products, select parking systems, and select vehicle repair tools and equipment. The multiplex factory houses state-of-the-art equipment including numerically-controlled turning and milling equipment, automated welding systems and full-capability services like comprehensive metallurgy testing, heat treatment, automated powder coating, and other specialty operations. The facility also houses assembly and packaging operation centers and product development testing labs for BendPak's growing customer base around the globe.



LIGHT AND MEDIUM-DUTY LIFT PRODUCTS

Our multi-department manufacturing complexes have allowed us to expand machinery and employees and triple our daily production capacity. All BendPak employees are Q.C. trained and follow rigid ISO-9001 guidelines. Every day, more than 700 employees around the world dedicate themselves to putting our core values into action. Safety is first—it's our company's top priority, followed closely by environmental responsibility, cost-efficiency, quality, customer service and accountability for all departments. These principles guide our highly skilled workforce towards BendPak's unified vision.

Across the globe, BendPak's facilities encompass over 600,000 square feet in total and consist of vertically integrated manufacturing, operations and logistics facilities. Each location follows strict guidelines as outlined by ISO-9000, further supporting our position as a premier global manufacturer. At BendPak, we ensure that our offshore manufacturing is no different in approach, standards, quality, inspection or packaging from our domestic production. These facilities are audited year round and undergo systematic evaluation of documented quality programs such as TUV, ANSI/ALI ALCTV, CSA, UL and AS/NZS 1418.9. The programs themselves are audited quarterly, regardless of the facility location, to ensure continued compliance with all applicable standards.



BendPak, Ranger Products and BendPak / Ranger related marks are trademarks and/or registered trademarks of BendPak Inc.



BP BendPak

R Ranger

1645 Lemonwood Drive • Santa Paula, CA USA 93060
Tel: 1-805-933-9970 • Fax: 1-805-933-9160 • www.bendpak.com